

# F 6X

## 6 CHANNEL MIXING CONSOLE WITH MULTI-FX

### DESCRIPTION

The F 6X features 2 Mic preamp inputs, 2 mono line inputs, 2 stereo line inputs plus multi-FX with balanced main output (Stereo XLR + TRS). The mono channels are provided with 3-band EQ and stereo channels with 2-band EQ. The mixer features 16 PRO DSP internal FX presets and an Aux send (post FX) with rotary knob control.



### FEATURES

- 2 Mic/Line inputs
- 2 stereo line inputs
- One Aux/FX (post)
- Balanced main output +28 dB (Stereo XLR + TRS)
- 16 presets PRO DSP internal FX
- Sturdy metal chassis
- External universal power supply
- Designed and engineered in Italy

**TECHNICAL SPECIFICATIONS**

<b>Electronic specifications</b>	Frequency Response:	20 Hz ÷ 20 kHz
	THD+N, 20dB gain, 0dBu out	<0,02

---

<b>Inputs</b>	Mic:	2
	Gain Range:	0 dB ÷ -50 dB
	Mic Inputs Impedance:	14 kohm
	Low Cut:	80 Hz
	Phantom Power +48V:	Yes
	Mono Line:	2
	Gain Selection:	20 dB ÷ -30 dB
	Line Input Impedance:	21 kohm
	Stereo Line:	2
	Gain Selection:	20 dB ÷ -30 dB
Stereo Line Input Impedance (kOhm)	15 kohm	

---

<b>Outputs</b>	Main MIX:	1
	FX Send:	1
	AUX Output:	1
	Phones:	1

---

<b>Outputs specifications</b>	Main Out Level:	28 dBu
	Aux Out Level:	28 dBu
	Phones Out impedance (ohm):	150 ohm

---

<b>EQ</b>	Input Channels EQ:	2 Shelving 1
	Description:	High: +/-15 dB @ 10 kHz Shelving, Mid: +/-15 dB @ 1,250 kHz, Bell Low: +/-15 dB @ 100 Hz Shelving.

---

<b>Auxiliary sends</b>	FX POST:	1
------------------------	----------	---

---

<b>Internal Effects</b>	Send Effects:	1
-------------------------	---------------	---

---

<b>Other features</b>	Footswitch:	Yes
-----------------------	-------------	-----

---






<b>Electrical specifications</b>	Power supply:	External
	Voltage requirements:	100 V - 240 V
	Power consumption (MAX):	12 W
<hr/>		
<b>Standard compliance</b>	CE marking:	Yes
<hr/>		
<b>Physical specifications</b>	Cabinet/Case Material:	Metal
	Color:	Black
<hr/>		
<b>Size</b>	Height:	80 mm / 3.15 inches
	Width:	252 mm / 9.92 inches
	Depth:	210 mm / 8.27 inches
	Weight:	1.8 kg / 3.97 lbs
<hr/>		
<b>Shipping informations</b>	Package Height:	122 mm / 4.8 inches
	Package Width:	378 mm / 14.88 inches
	Package Depth:	260 mm / 10.24 inches
	Package Weight:	2.75 kg / 6.06 lbs

**PART NUMBER**

- **17140088**

F 6X

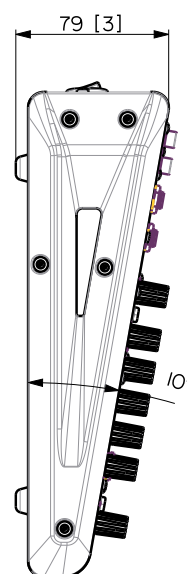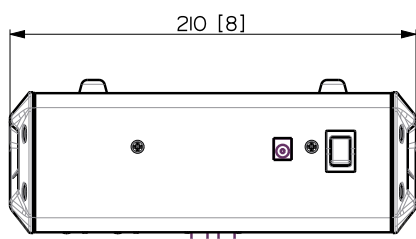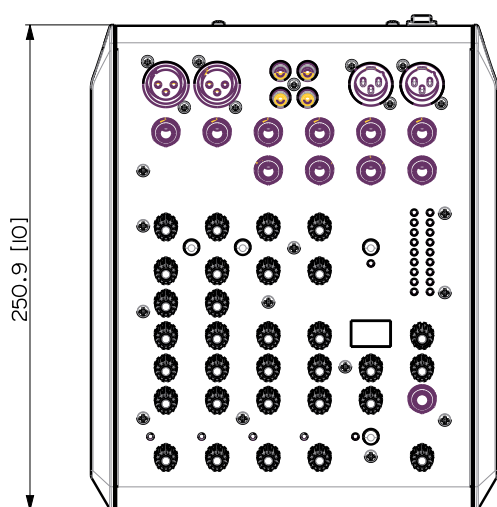

VISTA 3D / 3D VIEW

	MIXER F 6X 90-240 V	REV. A
--	---------------------	-----------